

## Features

- Low power consumption <0.35W per end
- Electrical interface compliant to SFF-8431
- Up to 300m on OM3 MMF
- 850nm VCSEL transmitter, PIN photo-detector receiver
- Operating case temperature 0°C to +70°C
- 3.3V power supply voltage
- RoHS 6 compliant
- Hot Pluggable SFP+ form factor
- Good EMI performance

## Applications

- 10 Gigabit Ethernet
- 1x InfiniBand QDR. DDR, SDR
- High-performance computing clusters
- 4G and 8G Fibre Channel Applications
- Servers, switches, storage , host card adapters and datacenter

## Description

The Honlus SFP+ Active Optical Cables are direct-attach fiber assemblies with SFP+ connectors. They have very good power consumption performance .They are suitable for very short distances and offer a cost-effective way to connect within racks and across adjacent racks. Honlus SFP+ Active Optical Cables' length is up to 300 meters on OM3 MMF.

## Absolute Maximum Ratings

The operation in excess of any absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit	Note
Storage Temperature	TST	-20	85	degC	
Relative Humidity(non-condensing)	RH	0	85	%	
Operating Case Temperature	TOPC	0	70	degC	
Supply Voltage	VCC	-0.3	3.6	V	
Input Voltage	Vin	-0.3	Vcc+0.3	V	

### Recommended Operating Conditions and Supply Requirements

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	TOPC	0		70	degC
Power Supply Voltage	VCC	3.13	3.3	3.47	V
Power Consumption(per end)		-		0.35	W
Data Rate	DR		10.3		Gbps
Data Speed Tolerance	ΔDR	-100		+100	ppm

### Optical Characteristics

All parameters are specified under the recommended operating conditions with PRBS31 data pattern unless otherwise specified.

Parameter	Symbol	Min	Typical	Max	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda_C$	840	850	860	nm	
Average optical Power	PAVG	-6			dBm	
Rise/Fall Time	Tr/Tf			50	ps	
Extinction Ratio	ER	3.5			dB	
Relative Intensity Noise	Rin			-128	dB/Hz	
Optical Return Loss Tolerance	TOL			12	dB	
Transmitter Reflectance	RT			-12	dB	



**10Gb/s SFP+ Active Optical Cable 850nm, 300m**  
**HOLS-APP85Mxxx-PPD-CV**

---



Receiver						
Center Wavelength	$\lambda_C$	840	850	860	nm	
Overload, each lane	OVL	-			dBm	
Receiver Sensitivity in OMA, each Lane	SEN			-11	dBm	

---

**Electrical Specifications**

Parameter	Symbol	Min	Typical	Max	Unit
Differential input impedance	Zin	90	100	110	ohm
Differential Output impedance	Zout	90	100	110	ohm
Differential input voltage amplitude aAmplitude	$\Delta V_{in}$	100		1800	mVp-p
Differential output voltage amplitude	$\Delta V_{out}$	400		800	mVp-p
Bit Error Rate	BR				E-12
Input Logic Level High	V <sub>IH</sub>	2.0		V <sub>CC</sub>	V
Input Logic Level Low	V <sub>IL</sub>	0		0.8	V

## Mechanical Dimensions

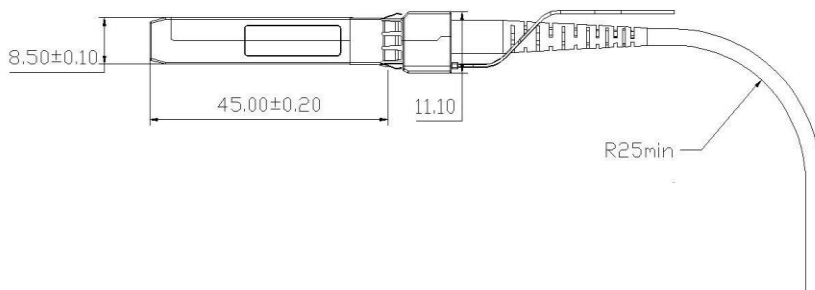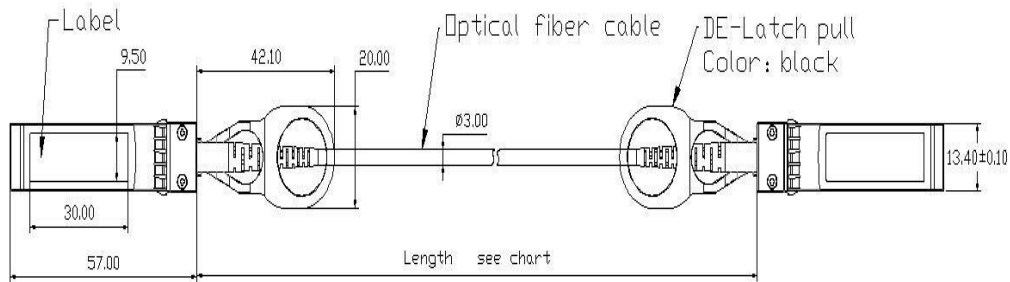

## ESD

This transceiver is specified as ESD threshold 1KV for high speed data pins and 2KV for all others electrical input pins, tested per MIL-STD-883, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

---

**Order Information**

<b>Part Number</b>	<b>Product Description</b>
HOLS-APP85M001-PPD-CV	1 meter SFP+ Active Optical Cable
HOLS-APP85M002-PPD-CV	2 meter SFP+ Active Optical Cable
HOLS-APP85M007-PPD-CV	7 meter SFP+ Active Optical Cable
HOLS-APP85M01-PPD-CV	10 meter SFP+ Active Optical Cable
HOLS-APP85M1-PPD-CV	100 meter SFP+ Active Optical Cable
HOLS-APP85M3-PPD-CV	300 meter SFP+ Active Optical Cable

Performance figures, data and any illustrative material provided in this datasheet are typical and must be specifically confirmed in writing by Honlus before they become applicable to any particular order or contract. In accordance with the Honlus policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Honlus or others. Further details are available from any Honlus sales representative.